

SPV1□□□-NB Analog Output Module

User Manual



I. Precautions

- Do not operate this product beyond its design limits under any circumstances.
- The power supply for this product is 24V DC. Strictly prohibit the use of 220V AC power.
- This product should be installed in a safe location. The shell's maximum withstand temperature is +85°C.
- When used in environments with strong magnetic interference, Shielded cable is recommended for signal lines.
- Strictly prohibit unauthorized disassembly, modification, or repair of this product.
- Pay attention to the wiring method of this product to ensure correct Wiring and avoid damaging the product.
- Read this manual carefully before installation and use. If you have Any questions, please contact our technical support personnel or refer to relevant technical guidance videos.
- Our company is not responsible for damage to components other than this product during use.
- Please download the latest electronic version of the documentation. The content of this manual is for reference only. We continuously improve the user experience, and technical parameters are subject to change without notice.

II. Product Dimensions

- Product dimensions: **96mm (L) X 38mm (W) X 31mm (H)**
- Industrial-grade flame-retardant plastic shell, standard DIN35 rail mounting.

III. Operating Environment

- Do not expose this product to excessively high or low temperatures.
- The surrounding environment must be free from strong vibration, impact, and electromagnetic interference such as large currents and sparks.
- The operating environment must not contain harmful substances that cause severe corrosion to metal or plastic components.
Do not use or store the product in harsh environments, otherwise it will affect the electrical performance of the product.
- Operating Temperature: -40°C ~ +80°C Relative Humidity: 10% ~ 90%RH (non-condensing)

IV. After-Sales Service

We are committed to providing you with comprehensive after-sales service and warranty policy. The product warranty period is three years. During the warranty period, if the product fails due to non-human factors, we will provide free repair or replacement service. Damage caused by violation of operating regulations and requirements will require payment of parts cost and repair fee. After the warranty period expires, we continue to provide technical support and assistance. During this period, replacement parts are provided at cost price.

V. Application Fields



Automation Equipment




Medical Electronics



Remote Monitoring



Process Control

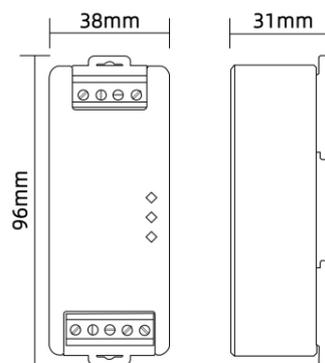

· Product Introduction

SPV Analog Output Module is precision-engineered based on a new-generation embedded system. It features an isolated communication interface that supports direct connections with PCs, PLCs, touchscreen panels, and other terminal devices. Equipped with a transient suppression circuit, it effectively mitigates various surge pulses, ensuring robust performance even in harsh operating environments.

SPV1□□□-NB Series Analog Output Module delivers 2 channels of analog output signals and is equipped with an RS485 communication interface. The module incorporates an advanced DAC converter, providing 16-bit output resolution with accuracy better than 0.1%. It features triple isolation between power supply, input, and output circuits. Designed to output analog signals compatible with field equipment, it meets the demands of applications requiring high signal integrity, including industrial sites, medical electronics, security monitoring, smart buildings, smart homes, power monitoring, and process control.

This product requires an independent power supply and adopts a DIN 35mm standard rail mounting method, enabling simple on-site installation and flexible use for various field applications.

· Technical Parameters

| Basic Parameters | |
|--------------------------|------------------------------------------------------------------------------------------|
| Power Supply | DC12~36V(DC24V recommended) |
| Power Consumption | <1.5W |
| Temperature Drift | ≤200ppm/°C |
| ESD Protection | ±15KV |
| Isolation Voltage | 3000VDC |
| Power Protection | Reverse connection voltage< -40V |
| Dielectric Strength | 1500 VAC / 1 minute (Power, Input, Output) |
| Insulation Resistance | ≥100MΩ (Power, Input, Output) |
| EMC Compatibility | Complies with GB/T18268.1 (IEC61326-1) |
| Applicable Field Devices | Devices supporting MODBUS-RTU protocol: Configuration software, PLC, HMI, PC, etc. |
| Output Terminal | |
| Number of Channels | 2 channels |
| Output Signal | 0-5V、0-10V、4-20mA、0-20mA |
| Load Capacity | Voltage Output: $R_L \geq 2\text{ k}\Omega$ |
| | Current Output: $R_L \leq 500\ \Omega$ |
| Output Resolution | 16-bit DAC |
| Output Accuracy | ±0.1%F.S (+25°C) |
| Response Time | ≤1mS |
| Output Linearity | 0.05% of F.S. |
| Output Protection | Over-Current or Over-Voltage Protection |
| Input Terminal | |
| Input Signal | RS-485 communication signal |
| Communication Protocol | Standard MODBUS-RTU protocol |
| Communication Distance | 1200m (typical) |
| Environmental Conditions | |
| Operating Temperature | -40°C~+80°C |
| Storage Temperature | -40°C~+85°C |
| Relative Humidity | 10%~90%RH (non-condensing) |
| Atmospheric Pressure | 80kPa~106kPa |


· Terminal Description

| Terminal Mark | Function Description |
|---------------|---------------------------------------------------|
| VIN | Power supply positive terminal, DC12-36V input |
| OV | Power supply negative terminal |
| GND | RS-485 communication signal ground |
| A+ | RS-485 communication signal positive |
| B- | RS-485 communication signal negative |
| OUT1+ | Analog Output 1 Positive |
| OUT1- | Analog Output 1 Negative |
| OUT2+ | Analog Output 2 Positive |
| OUT2- | Analog Output 2 Negative |

· Indicator Light Description


| Indicator Label | Function Description |
|-----------------|--------------------------------------------------------------------|
| PWR | Power Indicator |
| TXD | RS485 Communication Indicator, flashes during data transmission |
| RXD | RS485 Communication Indicator, flashes during data reception |

· Wiring Method

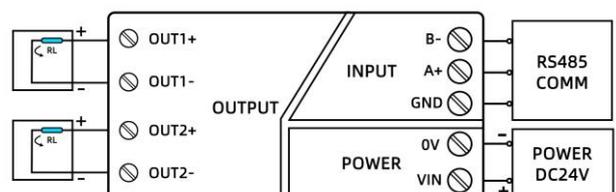


· Installation Instructions

This module uses the DIN35mm rail mounting method. The rail should comply with the installation dimension specifications for the TH35-7.5 type rail according to the national standard GB/T19334-2003. Users can easily install or remove the module on the rail. Installation must be stable and secure. This module also supports screw mounting without a rail.

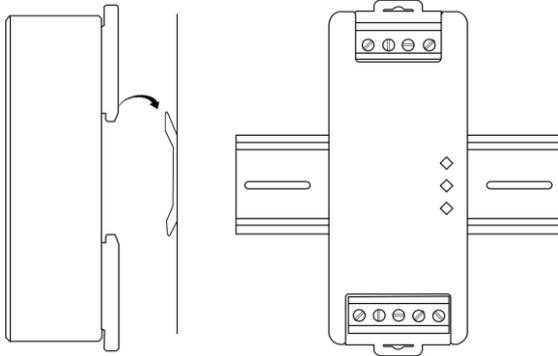

- Installation method of guide rail -

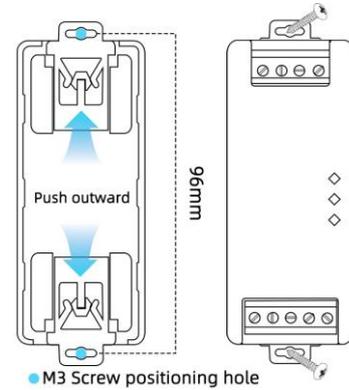

- Screw installation method -

· Product Naming Rules

SPV1020-NB11L as an example: Two-channel analog output module; 0-5V output signal; 0.1% output accuracy; RS485 communication; DC 12-36V power supply; form factor N.

| SPV | 1 | 02 | 0 | N | B | 1 | 1 | L |
|----------------------|--------------------------------------------------------------|--------------------|-----------------|--------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|-------------------------------------------------|-----------------------------------------------------------------------|--------------------------------------------|
| Product Type | Analog Output | Number of Channels | Sequence Number | Product Form Factor | Output Accuracy | Isolation Level | Communication Method | Power Supply |
| Analog Output Module | 1 0-5V 2 0-10V 3 4-20mA 4 0-20mA 9 Other signals | 1-32 | 0-9 | N Form Factor K Form Factor M Form Factor W Form Factor F Form Factor R Form Factor Y Form Factor Q Form Factor | A 0.2% B 0.1% C 0.05% D 0.01% | 0 Non-isolated 1 1500V 2 3000V 9 Other | 0 No Comm 1 RS485 2 ETH 3 RS485+ETH 4 CAN 9 Other Comm | L DC12-36V H AC220V C +12V D +24V |

• MODBUS-RTU Communication Protocol

The MODBUS-RTU protocol defines multiple function codes to achieve different functions. This manual explains the message format for commonly used function codes. This module only supports some of these function codes: 0X03, 0X04, 0X06, 0X10.

| Function Code | Register add | Function Description |
|---------------|--------------|---------------------------------------------------------------------------------------------------|
| 0X01 | 0XXXX | Read Coil Status (bit operation), e.g., read relay or digital output current state (ON/OFF) |
| 0X02 | 0XXXX | Read Input Status (bit operation), e.g., read one or more groups of digital input states (ON/OFF) |
| 0X05 | 0XXXX | Write Single Coil (bit operation), e.g., force a relay or digital output ON/OFF |
| 0X03 | 4XXXX | Read Holding Registers |
| 0X04 | 4XXXX | Read Input Registers (can be replaced by 0X03) |
| 0X06 | 4XXXX | Write Single Holding Register |
| 0X10 | 4XXXX | Write Multiple Holding Registers |

• Communication Parameter Settings

| Parameter | Setting Range | Default Value |
|-----------|----------------------------------------------------------|---------------|
| Address | 1~247 | 1 |
| Baud Rate | 1200、2400、4800、9600、14400、19200、38400、56000、57600、115200 | 9600 |
| Parity | None, Even, Odd | None |
| Stop Bits | 1, 2, 0.5, 1.5 | 1 |

• Communication Protocol Description

This communication board complies with the MODBUS RTU bus protocol, RS485 interface. The communication format is 11 bits:

1 start bit

8 data bits

1 parity bit (if used)

1 stop bit (with parity), 2 stop bits (without parity)

Data type: Unsigned int

With Parity

| | | | | | | | | | | |
|-----------|---|---|---|---|---|---|---|---|------------|----------|
| Start Bit | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | Parity Bit | Stop Bit |
|-----------|---|---|---|---|---|---|---|---|------------|----------|

Without Parity

| | | | | | | | | | | |
|-----------|---|---|---|---|---|---|---|---|----------|----------|
| Start Bit | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | Stop Bit | Stop Bit |
|-----------|---|---|---|---|---|---|---|---|----------|----------|

The message frame starts with a silence interval of more than 3.5 character times. The first field transmitted is the module add, followed by the function code, then the register add then the data, followed by the CRC16 check. It ends with a silence interval of more than 3.5 character times. The frame format is as follows:

| Start Bit | Module add | Function Code | Register add High Byte | Register add Low Byte | Register Data High Byte | Register Data Low Byte | CRC16 calibration | End |
|------------|------------|---------------|------------------------|-----------------------|-------------------------|------------------------|-------------------|------------|
| >3.5 Chars | 1 Byte | 1 Byte | 1 Byte | 1 Byte | 1 Byte | 1 Byte | 2 Byte | >3.5 Chars |
| | 1-247 | 0X03 0X06 | 0X00 | 0X01 | 0X00 | 0X01 | CRC | |

Function Code: 0X01

1.Host Request Frame:

| 1 Byte | 2 Byte | 3 Byte | 4 Byte | 5 Byte | 6 Byte | 7 Byte | 8 Byte |
|------------------------|---------------|-------------------------------|------------------|----------------------------|--------|---------------------------------|--------|
| ADR | 0X01 | Start address Hi | Start address Lo | Qty Hi | Qty Lo | CRC Lo | CRC Hi |
| Module address (1~247) | Function code | coil start address to be read | | number of coils to be read | | CRC16 checksum from bytes1 to 6 | |

2.Slave Response Frame (Correct) : Coil status 0 = OFF and 1 = ON

| 1 | 2 | 3 | 4、5 | 6、7 | | N-1、N | N+1 | N+2 |
|------------------------|---------------|--------------------------------------------|-----------------------------------------------------------------|--------------------|-------|--------------------|----------------------------------|----------|
| ADR | 0X01 | Coil status Byte Count | Coil Status 1 Data | Coil Status 1 Data | | Coil Status N Data | CRC16 Lo | CRC16 Hi |
| Module address (1~247) | Function code | Returns the number of bytes in coil status | Returns the wire net status data (one coil status is two bytes) | | | | CRC16 checksum from bytes 1 to N | |

Function Code: 0X02

1.Host Request Frame:

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
|------------------------|---------------|-----------------------------------------|------------------|----------------------------|--------|---------------------------------|--------|
| ADR | 0X02 | Start address Hi | Start address Lo | Qty Hi | Qty Lo | CRC Lo | CRC Hi |
| Module address (1~247) | Function code | The coil input start address to be read | | number of coils to be read | | CRC16 checksum from bytes1 to 6 | |

2.Slave Response Frame (Correct) : Coil status 0 = OFF and 1 = ON

| 1 | 2 | 3 | 4、5 | 6、7 | | N-1、N | N+1 | N+2 |
|------------------------|---------------|--------------------------------------------|-----------------------------------------|--------------------|-------|--------------------|---------------------------------|----------|
| ADR | 0X02 | Coil status Byte Count | Coil Status 1 Data | Coil Status 1 Data | | Coil Status N Data | CRC16 Lo | CRC16 Hi |
| Module address (1~247) | Function code | Returns the number of bytes in coil status | Returns multiple coil input status data | | | | CRC16 checksum from bytes1 to N | |

Function Code: 0X05

1.Host Request Frame: Coil status 0 = OFF and 1 = ON

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
|------------------------|---------------|----------------------|-----------------|-------------------------|---------------|---------------------------------|--------|
| ADR | 0X05 | Coil address Hi | Coil address Lo | Force Data Hi | Force Data Lo | CRC Lo | CRC Hi |
| Module address (1~247) | Function code | Written coil address | | Number of coils written | | CRC16 checksum from bytes1 to 6 | |

2.Slave Response Frame (Correct) :

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
|------------------------|---------------|----------------------|-----------------|--------------------------|---------------|---------------------------------|--------|
| ADR | 0X05 | Coil address Hi | Coil address Lo | Force Data Hi | Force Data Lo | CRC Lo | CRC Hi |
| Module address (1~247) | Function code | Written coil address | | Returns coil status data | | CRC16 checksum from bytes1 to 6 | |

Function Code: 0X03

1.Host Request Frame:

| | | | | | | | |
|------------------------|---------------|------------------------------------------|------------------|--------------------------|------------|--------------------------------|--------|
| 1 Byte | 2 Byte | 3 Byte | 4 Byte | 5 Byte | 6 Byte | 7 Byte | 8 Byte |
| ADR | 0X03 | Start address Hi | Start address Lo | Reg Qty Hi | Reg Qty Lo | CRC Lo | CRC Hi |
| Module address (1~247) | Function code | The register starting address to read is | | Number of registers read | | CRC16 checksum of bytes 1 to 6 | |

2.Slave Response Frame (Correct) :

| | | | | | | | | |
|------------------------|---------------|----------------------------------------------|-----------------------------------------------------------------|---------------|-------|------------------------------|--------------------------------|--------|
| 1 | 2 | 3 | 4、5 | 6、7 | | N-1、N | N+1 | N+2 |
| ADR | 0X03 | Byte Count | Reg 1 Data Hi | Reg 1 Data Lo | | Reg N Data Hi, Reg N Data Lo | CRC Lo | CRC Hi |
| Module address (1~247) | Function code | Returns the effect of reading register bytes | Returns multiple register data (one register data is two bytes) | | | | CRC16 checksum of bytes 1 to N | |

Function Code: 0X06

1.Host Request Frame:

| | | | | | | | |
|------------------------|---------------|--------------------------------|----------------|-----------------------------|-------------|--------------------------------|--------|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| ADR | 0X06 | Reg address Hi | Reg address Lo | Reg Data Hi | Reg Data Lo | CRC Lo | CRC Hi |
| Module address (1~247) | Function code | Register address to be written | | Register data to be written | | CRC16 checksum of bytes 1 to 6 | |

2.Slave Response Frame (Correct) :

| | | | | | | | |
|------------------------|---------------|--------------------------------------|----------------|-----------------------------------|-------------|--------------------------------|--------|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| ADR | 0X06 | Reg address Hi | Reg address Lo | Reg Data Hi | Reg Data Lo | CRC Lo | CRC Hi |
| Module address (1~247) | Function code | Returns the register address written | | Returns the written register data | | CRC16 checksum of bytes 1 to 6 | |

Function Code: 0X10

1.Host Request Frame:

| | | | | | | | | | | |
|------------------------|---------------|----------------------------------------------------|------------------------------|---------------------------------------|-----------------------------------------------------------------|------------|-------|------------|--------------------------------|-----------|
| 1 | 2 | 3、4 | 5、6 | 7 | 8、9 | 10、11 | | N-1、N | N+1 | N+2 |
| ADR | 0X10 | Start Add | Reg Qty | Byte Count | Reg 1 Data | Reg 2 Data | | Reg N Data | CRC Check | CRC Check |
| Module address (1~247) | Function code | The starting address of the register to be written | Validity of register written | Number of register data bytes written | Multiple register data written (One register data is two bytes) | | | | CRC16 checksum of bytes 1 to N | |

2.Slave Response Frame (Correct) :

| | | | | | | | |
|------------------------|---------------|------------------------------------------------------|--------------|-----------------------------------------|------------|--------------------------------|--------|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| ADR | 0X10 | Start Add Hi | Start Add Lo | Reg Qty Hi | Reg Qty Lo | CRC Lo | CRC Hi |
| Module address (1~247) | Function code | Returns the starting address of the register written | | Returns the number of registers written | | CRC16 checksum of bytes 1 to 6 | |

· Register Definition Table

| PLC add | Register add (HEX) | Function Definition | R/W Attribute | Value Range and Description |
|---------|--------------------|-------------------------------------|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 40002 | 1 | Channel 1 Analog Output Setpoint | Read Only | 0 to 25,000. The set value corresponds to the actual output signal. Example: For an output signal of 1.000 V/1.000 mA, the set value is 1,000. For an output signal of 5.000 V/5.000 mA, the set value is 5,000. |
| 40003 | 2 | Channel 2 Analog Output Setpoint | Read Only | Same parameters as Channel 1 setpoint |
| 40004 | 3 | Channel 3 Analog Output Setpoint | Read Only | Same parameters as Channel 1 setpoint |
| 40005 | 4 | Channel 4 Analog Output Setpoint | Read Only | Same parameters as Channel 1 setpoint |
| 40006 | 5 | Channel 5 Analog Output Setpoint | Read Only | Same parameters as Channel 1 setpoint |
| 40007 | 6 | Channel 6 Analog Output Setpoint | Read Only | Same parameters as Channel 1 setpoint |
| 40008 | 7 | Channel 7 Analog Output Setpoint | Read Only | Same parameters as Channel 1 setpoint |
| 40009 | 8 | Channel 8 Analog Output Setpoint | Read Only | Same parameters as Channel 1 setpoint |
| 40051 | 32 | Channel 1 Analog Output Upper Limit | Read/Write | 0~65535 |
| 40052 | 33 | Channel 1 Analog Output Lower Limit | Read/Write | 0~65535 |
| 40053 | 34 | Channel 2 Analog Output Upper Limit | Read/Write | 0~65535 |
| 40054 | 35 | Channel 2 Analog Output Lower Limit | Read/Write | 0~65535 |
| 40055 | 36 | Channel 3 Analog Output Upper Limit | Read/Write | 0~65535 |
| 40056 | 37 | Channel 3 Analog Output Lower Limit | Read/Write | 0~65535 |
| 40057 | 38 | Channel 4 Analog Output Upper Limit | Read/Write | 0~65535 |
| 40058 | 39 | Channel 4 Analog Output Lower Limit | Read/Write | 0~65535 |
| 40059 | 3A | Channel 5 Analog Output Upper Limit | Read/Write | 0~65535 |
| 40060 | 3B | Channel 5 Analog Output Lower Limit | Read/Write | 0~65535 |
| 40061 | 3C | Channel 6 Analog Output Upper Limit | Read/Write | 0~65535 |
| 40062 | 3D | Channel 6 Analog Output Lower Limit | Read/Write | 0~65535 |
| 40063 | 3E | Channel 7 Analog Output Upper Limit | Read/Write | 0~65535 |
| 40064 | 3F | Channel 7 Analog Output Lower Limit | Read/Write | 0~65535 |
| 40065 | 40 | Channel 8 Analog Output Upper Limit | Read/Write | 0~65535 |
| 40066 | 41 | Channel 8 Analog Output Lower Limit | Read/Write | 0~65535 |
| 40075 | 4A | Channel 1 Output Signal Type | Read/Write | 0: 0-5V 1:0-10V 2:0-20mA 3:4-20mA |
| 40076 | 4B | Channel 2 Output Signal Type | Read/Write | 0: 0-5V 1:0-10V 2:0-20mA 3:4-20mA |
| 40077 | 4C | Channel 3 Output Signal Type | Read/Write | 0: 0-5V 1:0-10V 2:0-20mA 3:4-20mA |
| 40078 | 4D | Channel 4 Output Signal Type | Read/Write | 0: 0-5V 1:0-10V 2:0-20mA 3:4-20mA |
| 40079 | 4E | Channel 5 Output Signal Type | Read/Write | 0: 0-5V 1:0-10V 2:0-20mA 3:4-20mA |
| 40080 | 4F | Channel 6 Output Signal Type | Read/Write | 0: 0-5V 1:0-10V 2:0-20mA 3:4-20mA |
| 40081 | 50 | Channel 7 Output Signal Type | Read/Write | 0: 0-5V 1:0-10V 2:0-20mA 3:4-20mA |
| 40082 | 51 | Channel 8 Output Signal Type | Read/Write | 0: 0-5V 1:0-10V 2:0-20mA 3:4-20mA |

| PLC add | Register add (HEX) | Function Definition | R/W Attribute | Value Range and Description |
|---------|--------------------|-----------------------|---------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| 40083 | 52 | Communication Address | Read/Write | 1~247 |
| 40084 | 53 | Baud Rate | Read/Write | 0: 1200bps 1: 2400bps 2: 4800bps 3: 9600bps 4: 14400bps 5: 19200bps 6: 38400bps 7: 56000bps 8: 57600bps 9: 115200bps |
| 40085 | 54 | Parity Bit | Read/Write | 0: No Parity 1: Even Parity 2: Odd Parity |
| 40086 | 55 | Stop Bit | Read/Write | 0: 1 Stop Bit 1: 1.5 Stop Bits 2: 2 Stop Bits |
| 40087 | 56 | Device No. 1 | Read Only | 0~65536 |
| 40088 | 57 | Device No. 2 | Read Only | 0~65536 |
| 40089 | 58 | Firmware Version | Read Only | 0~65536 |
| 40090 | 59 | Device Category | Read Only | 0~65536 |