

## SPS4□□□-NC Series Signal Isolator


### Operation Manual



scan the QR code to learn more

#### I. Precautions

- Do not operate this product beyond its design limits under any circumstances.
- The power supply for this product is 24V DC. Strictly prohibit the use of 220V AC power.
- This product should be installed in a safe location. The shell's maximum withstand temperature is +85°C.
- When used in environments with strong magnetic interference, Shielded cable is recommended for signal lines.
- Strictly prohibit unauthorized disassembly, modification, or repair of this product.
- Pay attention to the wiring method of this product to ensure correct Wiring and avoid damaging the product.
- Read this manual carefully before installation and use. If you have any questions, please contact our technical support personnel or refer to relevant technical guidance videos.
- Our company is not responsible for damage to components other than this product during use.
- Please download the latest electronic version of the documentation. The content of this manual is for reference only. We continuously improve the user experience, and technical parameters are subject to change without notice.

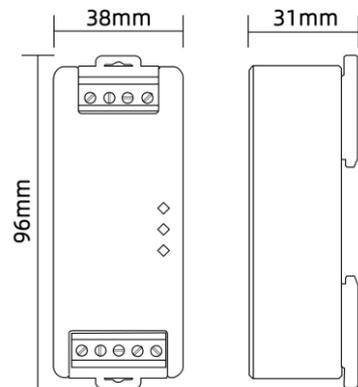

#### II. Product Dimensions

- Product dimensions: **96mm (L) X 38mm (W) X 31mm (H)**
- Industrial-grade flame-retardant plastic shell, standard DIN35 rail mounting.

#### III. Operating Environment

- Do not expose this product to excessively high or low temperatures.
- The surrounding environment must be free from strong vibration, impact, and electromagnetic interference such as large currents and sparks.
- The operating environment must not contain harmful substances that cause severe corrosion to metal or plastic components. Do not use or store the product in harsh environments, otherwise it will affect the electrical performance of the product.
- Operating Temperature: -20°C ~ +60°C Relative Humidity: 10% ~ 90%RH (non-condensing)

#### IV. After-Sales Service

We are committed to providing you with comprehensive after-sales service and warranty policy. The product warranty period is three years. During the warranty period, if the product fails due to non-human factors, we will provide free repair or replacement service. Damage caused by violation of operating regulations and requirements will require payment of parts cost and repair fee. After the warranty period expires, we continue to provide technical support and assistance. During this period, replacement parts are provided at cost price.

#### V. Application Fields



Automation Equipment



Medical Electronics



Remote Monitoring



Process Control

### · Product Introduction

The SPS series signal isolators utilize a new isolation chip and SiO<sub>2</sub> isolation and voltage-resistant technology to convert input voltage and current signals into linear voltage and current signals after isolation. The output signal of the transmitter module can quickly track changes in the input signal. They are widely used in measurement and control systems such as power, railway, communications, and PLCs, as well as various automatic control systems.

The SPS4□□□-NC series single-phase AC voltage transmitter isolators feature a precision internal design with electrically isolated input and output. They offer high accuracy, high isolation, high speed, and low drift. They address common-mode interference, electrical isolation, and signal standardization issues during high-speed signal transmission from sensors, transmitters, or instruments. They are particularly suitable for high-speed transient waveform acquisition, harmonic analysis, and rapid monitoring and alarm applications.

This product requires an independent power supply and is mounted on a standard 35mm DIN rail, offering simple on-site installation and flexible use, adapting to a variety of field applications.

### · Technical Parameters

Basic Parameters	
Power Supply	DC12~36V(DC24V recommended)
Power Consumption	<1.5W
Transmission Accuracy	±0.1%FS (+25° C)
Temperature Drift	≤200ppm/° C
Response Time	≤30mS
Non-Linearity	Maximum 0.075% at 5V
Power Protection	Reverse Power Voltage <-40V
Isolation Voltage	3000VDC
Dielectric Strength	1500VAC/1 minute (power, input, output)
Insulation Resistance	≥100MΩ (power, input, output)
Electromagnetic Compatibility	Complies with GB/T 18268.1 (IEC61326-1)
Input	
Input range	AC 0-1000V (see product name for input range)
Acquisition method	Voltage transformer
Input frequency	45-65Hz
Input impedance	≥20kΩ
Output Terminal	
Output Signal	0-5V
	0-10V
	4-20mA
	0-20mA
Load Capacity	Voltage Output RL ≥ 2kΩ
	Current Output RL ≤ 500Ω
Output Ripple	≤ 10mV (250Ω load)
Environmental Conditions	
Operating Temperature	-20°C~+60°C
Storage Temperature	-40°C~+85°C
Relative Humidity	10%~90%RH (non-condensing)
Atmospheric Pressure	80kPa~106kPa


### · Terminal Description

Terminal Mark	Function Description
VIN	Power supply positive terminal, DC12-36V input
OV	Power supply negative terminal
GND	Voltage output negative terminal
OUT	Voltage output positive terminal or current output negative terminal
VA+	Current output positive terminal
L	Input signal acquisition, single-phase input L line
NC	No pin
N	Input signal acquisition, single-phase input N line
NC-	No pin


### · Indicator Description

Indicator Mark	Function Description
PWR	Power indicator
SPAN	Full-Scale Output Adjustment Position
ZERO	Zero Output Adjustment Position

### · Wiring and indication

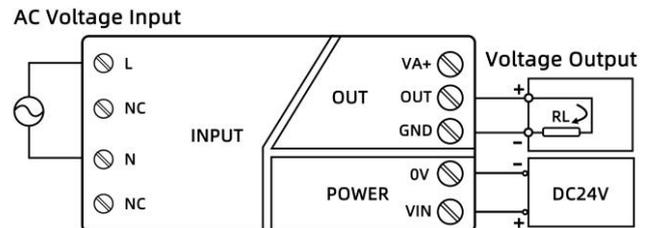


Voltage output wiring method

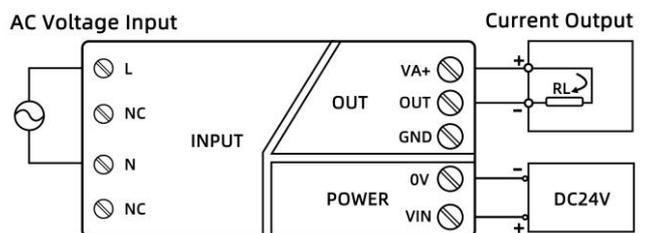

Current output wiring method

## · Installation Instructions

This module uses the DIN35mm rail mounting method. The rail should comply with the installation dimension specifications for the TH35-7.5 type rail according to the national standard GB/T19334-2003. Users can easily install or remove the module on the rail. Installation must be stable and secure. This module also supports screw mounting without a rail.

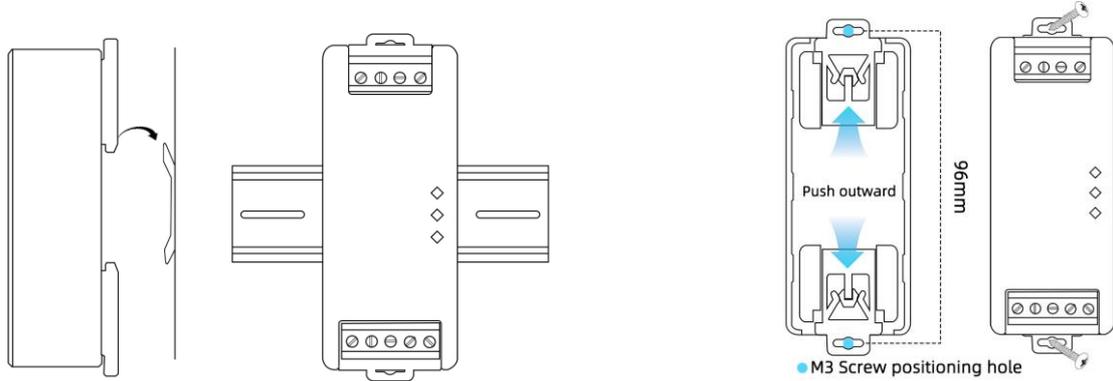

- Installation method of guide rail -

- Screw installation method -

## · Product Naming Rules

SPS4010-NC22L: Single-channel signal isolation module, input 0-200V AC, output 0-5V, transmission accuracy 0.1% F.S., N-shaped form factor, DC12-36V power supply.

SPS	4	01	0	N	C	2	2	L
Product Type	Input signal	Channel configuration	Output signal	Product appearance	Transmission accuracy	Isolation level	Input range	Power Supply
Signal isolation transmission module	1 DC Voltage 2 DC Current 3 Shunt 4 AC Voltage 5 AC Current 6 Resistance 7 Temperature 9 Other	01 1-input 1-output 02 1-input 2-output 03 2-input 2-output	1 0-5V 2 0-10V 3 4-20mA 4 0-20mA 9 Other	N Form Factor K Form Factor M Form Factor W Form Factor F Form Factor R Form Factor	A 0.5%FS B 0.2%FS C 0.1%FS D 0.05%FS	0 None 1 1500V Isolation 2 3000V Isolation 3 Other Voltages	0 0-5V 1 0-10V 2 0-50V 3 0-10V 4 0-250V 5 0-500V 6 0-750V 7 0-1000V 9 Other Voltages	L DC12-36V H AC220V C +12V D +24V Z Passive